



DERAY®-I 3000

- 55° to + 135° C










Flexible

Heat-shrinkable sleeve -
Modified polyethylene
Radiation crosslinked
Insulation class B (VDE 05 30)


Take a step in the right direction with DERAY-I 3000.

Its excellent shrinking abilities make it indispensable for complete enclosure of objects with large diameter variations. For example: cable brackets, resistors, capacitors etc. **DERAY-I 3000** is also very suitable for mechanical relief, marking connectors and wires, as well as repairing already connected cables.

Ordering size in mm	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Delivery units		
					lengths of 1,22 m m	spool m	mini spool m
1.6/0.5	1.6	0.5	0.15	0.45	30.5	300	150
3.2/1	3.2	1.0	0.18	0.55	30.5	300	150
4.8/1.5*	4.8	1.5	0.20	0.60	30.5	300	75
6.4/2	6.4	2.0	0.22	0.65	12.2	300	75
9.5/3	9.5	3.0	0.25	0.75	12.2	150	75
12.7/4	12.7	4.0	0.25	0.75	12.2	100	50
19/6	19.0	6.0	0.27	0.85	12.2	50	30
25.4/8	25.4	8.0	0.33	1.00	12.2	50	30
39/13	39.0	13.0	0.38	1.15	-	50	30



Standard colours						Special colours (on request)			
0 = black	2 = red	4 = yellow	6 = blue	9 = white	99 = transp.	1 = brown	3 = orange	5 = green	7 = violet
spool, mini spool	mini spool								
Delivery units									

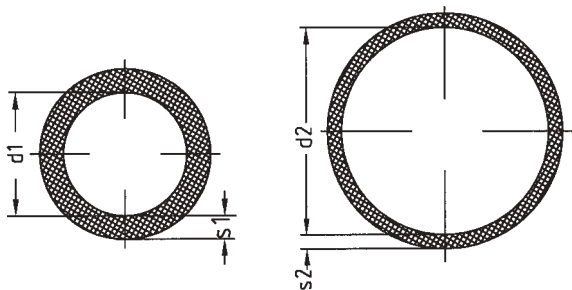

Remarks:
- Cut lengths - printed on request - with a surcharge
- Air-filled up to size 12,7/4
- Certifications available with a surcharge
- Sizes marked with * not VG approved
- Technical data pages 40-41
Subject to alteration.

