



DERAY®-IGY










- 55° to + 135° C

Flexible


Heat-shrinkable sleeve -
Modified polyethylene
Radiation crosslinked
Insulation class B (VDE 05 30)

DERAY-IGY is firmly based. This sleeve is extruded in dual colours and is flexible, non-meltable and quick shrinking. It was developed specifically for insulating and marking earthing conductors to VDE.

Ordering size in mm	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Delivery units		
					lengths of 1,22 m m	spool* m	mini spool m
3.2/1	3.2	1.0	0.18	0.55	30.5	300	150
4.8/1.5	4.8	1.5	0.20	0.60	30.5	300	75
6.4/2	6.4	2.0	0.22	0.65	12.2	300	75
9.5/3	9.5	3.0	0.25	0.75	12.2	150	75
12.7/4	12.7	4.0	0.25	0.75	12.2	100	50
19/6	19.0	6.0	0.27	0.85	12.2	50	30
25.4/8	25.4	8.0	0.34	1.00	12.2	50	30
39/13	39.0	13.0	0.39	1.15	12.2	50	30



Standard colours				
54 = green-yellow				

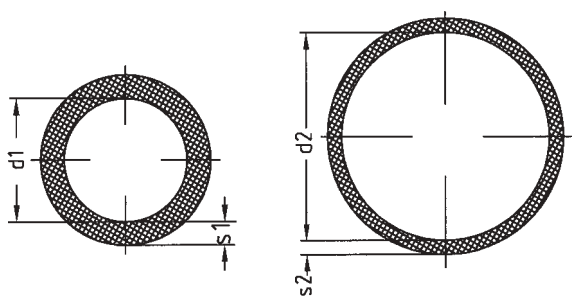

Remarks:
* only with MOQ
- Cut lengths - printed on request - with a surcharge
- Air-filled up to size 1/2"
- Technical data pages 40-41
Subject to alteration.

DEF
STAN
59/97