



DERAY® -KY 175

-55° to +175° C





* (Kynar®) Semi-rigid

Heat-shrinkable sleeve –








Modified PVDF radiation crosslinked
Insulation class F (VDE 05 30)

Invisible protection with visible results, is guaranteed by **DERAY-KY 175**. This non-meltable and self-extinguishing heat-shrinkable sleeve is highly abrasion resistant and extremely chemical resistant. These excellent material properties open up a broad range of applications for this transparent heat-shrinkable sleeve.

Ordering size in inches	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Weight max. g/m	Delivery units		
						lengths of 1,22 m m	spool m	mini spool m
3/64	1.2	0.6	0.12	0.24	1.3	30.5	300	–
1/16	1.6	0.8	0.12	0.24	1.6	30.5	300	–
3/32	2.4	1.2	0.12	0.24	2.2	30.5	300	–
1/8	3.2	1.6	0.12	0.24	3.2	30.5	300	–
3/16	4.8	2.4	0.12	0.24	4.1	30.5	300	–
1/4	6.4	3.2	0.15	0.30	6.3	12.2	300	–
3/8	9.5	4.8	0.15	0.30	9.0	12.2	150	–
1/2	12.7	6.4	0.15	0.30	11.9	12.2	100	–
3/4	19.0	9.5	0.20	0.40	26.3	12.2	50	–
1	25.4	12.7	0.25	0.50	37.8	12.2	50	–



Standard colour		Special colour (on request)		
99 = transparent		0 = black		

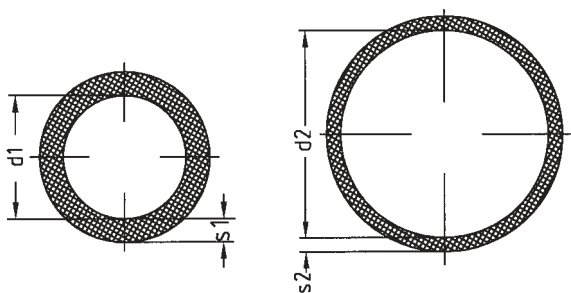

* ® = registered trademark of ELFAtochem for the raw material

- Remarks:
- Cut lengths – printed on request – with a surcharge
 - Air-filled up to size 1/4"
 - Certifications available with a surcharge
 - PAN approved as DERAY-Kynar
 - Technical data pages 42-43
 - Subject to alteration.