



DERAY® -KYF 190

- 55° to + 190° C

Flexible

Heat-shrinkable sleeve -









Modified fluoropolymer

Radiation crosslinked


Insulation class C (VDE 05 30)

DERAY-KYF 190 is a remarkable solution. This non-meltable, self-extinguishing, thin-walled heat-shrinkable sleeve type complements the advantages of DERAY-KY 175 with a high degree of flexibility. Excellent insulation values, electrical and mechanical values in a high temperature range, continuous temperature resistance up to 190° C, as well as extreme chemical resistance, open up a wide range of applications for this material for protecting components in constricted areas.

Ordering size in inches	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Delivery units		
					lengths 1,22 m m	spool m	mini spool m
3/64	1.2	0.6	0.12	0.24	30.5	300	-
1/16	1.6	0.8	0.12	0.24	30.5	300	-
3/32	2.4	1.2	0.12	0.24	30.5	300	-
1/8	3.2	1.6	0.12	0.24	30.5	300	-
3/16	4.8	2.4	0.12	0.24	30.5	300	-
1/4	6.4	3.2	0.15	0.30	12.2	300	-
3/8	9.5	4.8	0.15	0.30	12.2	150	-
1/2	12.7	6.4	0.15	0.30	12.2	100	-



Standard colour		Special colour (on request)	
99 = transparent		0 = black	

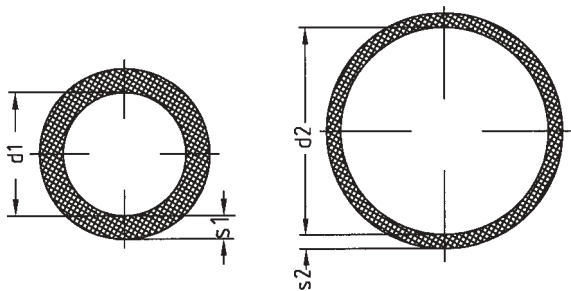

Remarks:
 - Cut lengths - printed on request - with a surcharge
 - Air-filled up to size 1/4"
 - Certifications available with a surcharge
 - Technical data pages 42-43
 - other special colours on request
 Subject to alteration.

