










DERAY®-LSB

-45° to +105° C


Very flexible
 Heat-shrinkable sleeve
 Modified polyolefin
 Radiation crosslinked
 Insulation class A (VDE 05 30)

DERAY-LSB is a perfect solution if rationality is required in large-scale production. This product shrinking at low temperatures enables you to handle things quickly at a favourable price. **DERAY-LSB** is halogen-free.

Ordering size in inches	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Delivery units		
					lengths of 1,22 m m	spool m	mini spool m
1/8	3.2	1.6	0.25	0.50	-	300	-
3/16	4.8	2.4	0.25	0.50	-	300	-
1/4	6.4	3.2	0.30	0.60	-	300	-
3/8	9.5	4.8	0.30	0.60	-	150	-
1/2	12.7	6.4	0.30	0.60	-	100	-
3/4	19.0	9.5	0.40	0.80	-	50	-



Standard colours				
0 = black				

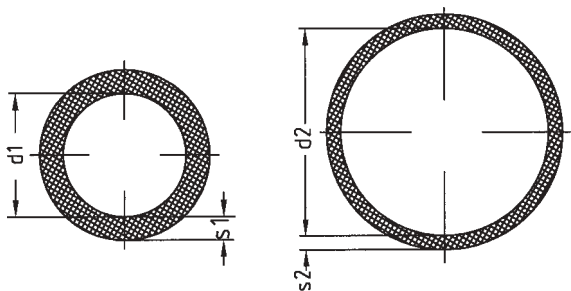

Remarks:
 - Cut lengths - printed on request - with a surcharge
 - Air-filled up to size 1/2"
 - Sizes marked with * are non-standard products.
 - Technical data pages 40-41
 Subject to alteration.