











DERAY®-LSI*

- 55° to + 135° C


Very flexible
 Heat-shrinkable sleeve -
 Modified polyolefin
 Radiation crosslinked
 Insulation class B (VDE 05 30)

DERAY-LSI offers its outstanding flexibility to the most rigid structures. This highly flexible, UL approved sleeve, shrinking at low temperatures provides security with regards to the processing of sensitive components.

Ordering size in inches	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Delivery units		
					lengths of 1,22 m m	spool m	mini spool m
3/64	1.2	0.6	0.20	0.40	-	300	-
1/16	1.6	0.8	0.20	0.40	-	300	-
3/32	2.4	1.2	0.25	0.50	-	300	-
1/8	3.2	1.6	0.25	0.50	-	300	-
3/16	4.8	2.4	0.25	0.50	-	300	-
1/4	6.4	3.2	0.30	0.60	-	300	-
3/8	9.5	4.8	0.30	0.60	-	150	-
1/2	12.7	6.4	0.30	0.60	-	100	-
3/4	19.0	9.5	0.40	0.80	-	50	-
1	25.4	12.7	0.45	0.90	-	50	-



Standard colour				
0 = black				

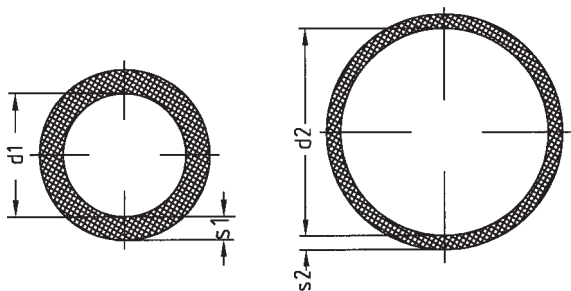

Remarks:
 - Cut lengths - printed on request - with a surcharge
 - Air-filled up to size 1/2"
 * only with MOQ
 - Certifications available with a surcharge
 - Technical data pages 42-43
 Subject to alteration.