












DERAY® -V 25 TW*

- 75° to + 150° C


Very flexible
Thin-walled
Heat-shrinkable sleeve -
Modified elastomer
Radiation crosslinked
Insulation class B (VDE 05 30)

Safeguard with DERAY-V 25 TW. This VG approved heat-shrinkable sleeve is extremely flexible due to its thin wall. This non-meltable, high/low temperature resistant sleeve type is especially suited for mechanical, thermal and chemical protection of sensitive components.

Ordering size in inches	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Weight max. g/m	Delivery units		
						lengths of 1,22 m m	spool m	VG-spool m
3/32	2.4	1.2	0.25	0.55	4.5	-	300	50
1/8	3.2	1.6	0.25	0.55	6.2	-	300	50
3/16	4.8	2.4	0.25	0.55	7.5	-	300	50
1/4	6.4	3.2	0.30	0.65	12.1	-	300	50
3/8	9.5	4.8	0.30	0.65	17.0	-	150	50
1/2	12.7	6.4	0.30	0.65	21.9	-	100	30
3/4	19.0	9.5	0.40	0.85	37.9	-	50	30
1	25.4	12.7	0.45	0.95	60.9	-	50	30
1 1/4	31.8	15.9	0.50	1.05	82.0	-	50	30
1 1/2	38.0	19.0	0.50	1.05	103.0	-	50	15



Standard colours				
0 = black				

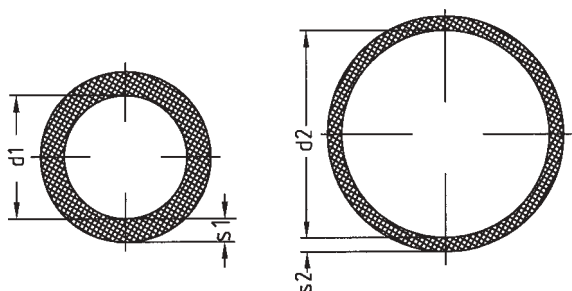

Remarks:
* only with MOQ
- Cut lengths - printed on request - with a surcharge
- Air-filled up to size 1/2"
- Certifications available with a surcharge
- Technical data pages 42-43
Subject to alteration.