



DERAY®-VA 25











-75° to +150°C

Very flexible
 Heat-shrinkable sleeve -
 Modified elastomer
 Radiation crosslinked
 Insulation class B (VDE 05 30)


DERAY-VA25 the right choice for harsh environments.

Due to extraordinary material properties, this self-extinguishing, highly flexible elastomer sleeve is suited for applications under extreme environmental conditions. The recommended applications for this sleeve are high temperature and chemical resistant protection of electric wires or special cable protection coverings.

Ordering size in inches	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Delivery units		
					lengths of 1,22 m m	spool** m	mini spool m
1/8	3.2	1.6	0.40	0.80	-	300	50
3/16	4.8	2.4	0.45	0.90	-	300	50
1/4	6.4	3.2	0.50	1.00	-	300	50
3/8	9.5	4.8	0.55	1.10	-	150	50
1/2	12.7	6.4	0.65	1.30	-	100	30
3/4	19.0	9.5	0.75	1.50	-	50	30
1	25.4	12.7	0.95	1.90	-	50	30
1 1/2	38.0	19.0	1.25	2.50	-	50	15
2*	51.0	25.4	1.55	3.10	-	50	-
3*	76.0	38.0	1.65	3.30	-	25	-



Standard colours				
0 = black				

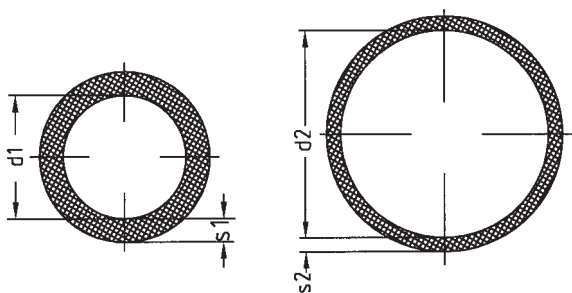

Remarks:
 * only with MOQ
 - Cut lengths - printed on request - with a surcharge
 - Air-filled up to size 1/2"
 - Technical data pages 42-43
 ** only with MOQ
 Subject to alteration.