



DERAY®-VI









- 55° to + 135° C

Flexible


Heat-shrinkable sleeve -
Modified polyolefin
Radiation crosslinked
Insulation class B (VDE 05 30)

DERAY-VI: a flexible mover. The main characteristic of this universal non-meltable shrink tube is the high elasticity of the material. Reliable insulation, sound mechanical protection and corrosion resistance make **DERAY-VI** an all around shrink sleeve for protective enclosure of flexible assembly components.

Ordering size in inches	Diameter as supplied min. d2 mm	Diameter fully recovered max. d1 mm	Wall thickness as supplied S2 appr. mm	Wall thickness fully recovered S1 appr. mm	Delivery units		
					lengths of 1,22 m m	spool m	mini spool m
3/64	1.2	0.6	0.20	0.40	-	300	-
1/16	1.6	0.8	0.20	0.40	-	300	-
3/32	2.4	1.2	0.25	0.50	-	300	-
1/8	3.2	1.6	0.25	0.50	-	300	-
3/16	4.8	2.4	0.25	0.50	-	300	-
1/4	6.4	3.2	0.30	0.60	-	300	-
3/8	9.5	4.8	0.30	0.60	-	150	-
1/2	12.7	6.4	0.30	0.60	-	100	-
3/4	19.0	9.5	0.40	0.80	-	50	-
1	25.4	12.7	0.45	0.90	-	50	-
1 1/2	38.0	19.0	0.50	1.00	-	50	-
2	51.0	25.4	0.55	1.10	-	50	-



Standard colours			Special colours (on request)						
0 = black			1 = brown*	2 = red*	4 = yellow*	5 = green*	6 = blue*	9 = white*	99 = transparent*

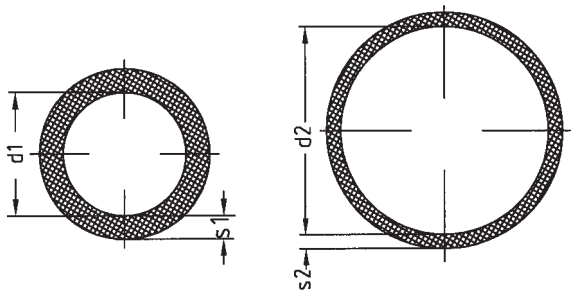

Remarks:
- Cut lengths - printed on request - with a surcharge
- Air-filled up to size 1/2"
- Certifications available with a surcharge
- Colours marked with * PAN approved
- Technical data pages 42-43
Subject to alteration.